

SHUNDA FLOORING

Advantages

- Interlocking click system for fast and easy installation
- Stunning and luxurious embossed texture with natural look of wood
- High durable surface treatment
- Excellent resistance to water, suitable for home and business
- Impact noise reduction
- Flame retardant and self extinguishing
- Heat insulation, no more cold stone under your feet
- Environmental friendly, made with recycled materials with major eco-credentials

Keunggulan

- Sistem " *Interlocking* " untuk pemasangan yang mudah dan cepat
- Tekstur mempesona dan mewah dengan tampilan kayu alami
- Daya tahan produk yang kuat untuk jangka panjang
- Ketahanan yang baik terhadap air, dapat digunakan dalam rumah dan kantor
- Dapat mengurangi bunyi
- Tidak merambat api
- Insulasi panas, telapak kaki anda tidak akan terasa dingin lagi
- Ramah lingkungan, terbuat dari bahan yang dapat didaur ulang

Manufactured by :

PT SHUNDA SUCAI INDONESIA

Customer Support : 021-2255 3210

www.sd.co.id

Contact Us :



SHUNDA FLOORING

Solution to Every Home Design

www.sd.co.id



SELAMAT DATANG di **SHUNDA Flooring!**

Ketika Anda menginginkan sebuah produk dengan tingkat kualitas yang menjamin impian kreatif Anda akan bertahan selamanya terpasang pada ruangan-ruangan Anda - pilihlah **SHUNDA Flooring**.

SHUNDA Flooring memberikan kemungkinan yang tiada batas pada desain indah sebuah ruangan kepada konsumen. Kami merupakan produk papan lantai *polyboard* dengan bahan yang bebas kayu dan ramah lingkungan sehingga memiliki banyak keunggulan-keunggulan dari berbagai hal. Komitmen kami adalah menyediakan produk lantai kualitas terbaik yang memenuhi standar kepada seluruh konsumen. Dengan teknologi terbaru yang digunakan dalam proses produksi, **SHUNDA Flooring** dapat dengan mudah menciptakan ruangan yang nyaman dan elegan dengan produk kualitas terbaik.

SHUNDA Flooring merupakan solusi lantai yang tepat untuk rumah dan kantor Anda. Dengan metode pemasangan *floating and interlocking system*, transformasi gaya ruangan Anda menjadi sangat mudah.

Some call it flooring, We call it a foundation for quality living.

DECOR FLOORING
Burmese Rosewood

ARTICLE NO
SF 1601

PLANK SIZE
1218*180*7mm

SHUNDA
FLOORING

DECOR FLOORING
Red Oak Wood

ARTICLE NO
SF 1602

PLANK SIZE
1218*180*7mm

03

SHUNDA
FLOORING

DECOR FLOORING	ARTICLE NO	PLANK SIZE
Sycamore Maple Wood	SF 1603	1218*180*7mm



DECOR FLOORING
Brazilian Walnut

ARTICLE NO
SF 1604

PLANK SIZE
1218*180*7mm


05

SHUNDA
FLOORING

Shunda Flooring Test Standard


Specification	Method	EN Standard	Shunda Flooring
Length (mm)	EN427	230-610mm: ± 0.3	230-610mm:± 0.25
		610-1380mm: ± 0.5	610-1380mm:± 0.40
Width (mm)		± 0.15	± 0.10
Straightness (mm)		≤ 0.25	≤ 0.20
Squareness (mm)		≤ 0.25	≤ 0.20
Arrangement of Space (mm)		≤0.20	≤ 0.15
Thickness (mm)	EN428	≥ 4.0 mm: ± 0.2	≥ 4.0 mm: ± 0.2
High Temperature Shrinkage (%)	EN434	CLICK: ≤ 0.20	CLICK: ≤ 0.10
High Temperature Warped (mm)		CLICK: ± 1.5	CLICK:± 1.0
Peel Strength (N/5CM)	EN431	Wearlayer ≤ 0.12mm: ≥ 38N	Wearlayer ≤ 0.12mm: ≥ 40N
		0.12mm ≤ Wearlayer ≤ 0.55mm: ≥ 55N	0.12mm ≤ Wearlayer≤ 0.55mm:≥ 58N
		Wearlayer ≤ 0.55mm: ≥ 65N	Wearlayer ≤ 0.55mm: ≥ 70N
Scratch (g)	/	≥ 2500	≥ 2600
Abrasion Loss (g)	EN-660-2	≤0.015	≤ 0.015 Class T
Slip Resistance	DIN 51130:2004	R10	R10
Color Fastness to Light	EN ISO 105 B02	6	6

Shunda Flooring Structure

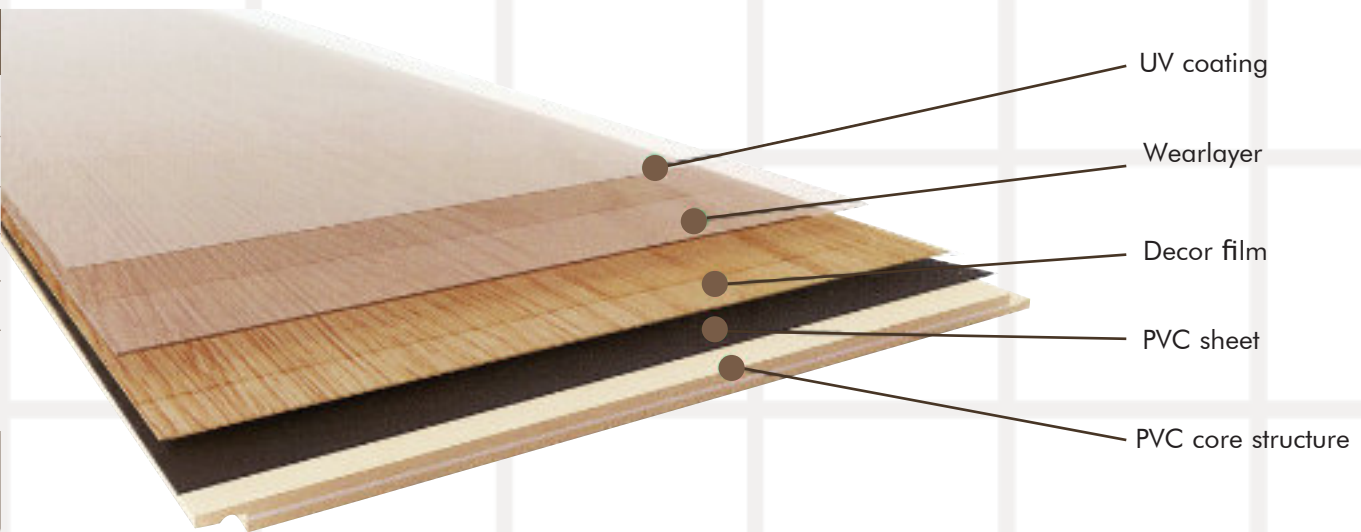

THICKNESS	PVC Core	PVC Layer	Wear Layer
7 mm	5.5 mm	1,5 mm	0.3 mm
			0.5 mm

INTERLOCKING CLICK SYSTEM



SHUNDA
FLOORING



